



PROFESSIONAL CHEMICAL SOLUTIONS

Who is ?



sports profile

CRIS CANO
@cris_cano

- Started karting at 9 years old
- Pole position in the Spanish Karting Championship
- Fastest lap in the European Karting Championship
- Runner-up in the Spanish F. Renault 1.6
- Runner-up in the 500km Motorland with a PORSCHE GT3 CUP
- VICTORY at 24h of Barcelona 2007 with a SEAT Leon Supercup
- Endurance rider currently in Touring Cars and Classic Motorcycles

business profile

- Safety driving instructor
- Sports driving instructor
- Coordinator of sports events
- Precision driver in advertising filming
- Product trainer for automotive products
- Presenter of automotive training videos
- Presenter on the Carnovo channel (YouTube)
- Presenter of Driver61 in Spanish (YouTube) more than 120,000 subscribers
- Currently General Manager of CEROIL PRODUCT, S.L.

Founded by father and son dedicated to car and motorcycle racing.

sports profile

JUAN CANO

- National Traffic Parks Champion (1965)
- Professional road cyclist
- Motorcycling racing rider for 15 years
- Car racing driver for 10 years
- Runner-up in Spanish SBK Championship
- Runner-up in the 24h of Montjuic Moto
- Runner-up in the 24h of Barcelona Auto
- Participation in SBK World Championship
- Participation in Endurance World Championship
- Currently endurance racing driver in Touring cars and classic motorbikes

business profile

- GALFER Sales Manager (30 years)
- MOTOREX Spain CEO (25 years)
- Founder of the CEROIL brand in 2003
- CEROIL PRODUCT, S.L. CEO (17 years)
- Currently President of CEROIL PRODUCT, S.L.



Brand and products developed with the demands of competition in mind, to offer greater performance and better prevention.



Visit our social profiles



PRODUCT INDEX

Page

FUEL ADDITIVES

INYETSOL +
STOP SMOKE
CATALYST CLEANER

DIESEL POWER
DPF CLEANER
ACTICIDE CMG
POWER BOOST

04

LUBRICANT ADDITIVES

PLATINUM
HYDRAULIC TAPPETS
VISCOSITY +

05

KITS

ECONOMIZER KIT
2-PHASE DPF CLEANER KIT

06

STOP LEAK

EXPRESS RADIATOR STOP LEAK
COPPER RADIATOR STOP LEAK

ENGINE STOP LEAK
POWER STEERING STOP LEAK
MT STOP LEAK

07

SPRAYS

ADMISION CLEAN
AFLOJATODO
BRAKE CLEANER
QUICK START
CARBON CLEANER

INJECTOR UNBLOCKER
DRY LUBE
CONTACT CLEANER
ALCOHOL SPRAY
MULTI LUBE
GRASA MP 2 .5

09

CLEANING & MAINTENANCE

CLEANER +
ULTRA CLEANER
BRAKE CLEANER
UREA
SCR CLEANER
GASKET SILICONE

RADIATOR CLEANER - ACIDIC
RADIATOR CLEANER - ALKALINE
ENGINE CLEANER
BODYWORK SHAMPOO
WINDSHIELD WIPERS
HAND WASH PASTE

11

ANTIFREEZE · COOLANTS

ORGANIC ANTIFREEZE 3%
ORGANIC ANTIFREEZE 10%
ORGANIC ANTIFREEZE 30%
ORGANIC ANTIFREEZE 50%

G-12 50% (LOW TEMPERATURES)
WINTER DIESEL
RACING COOLANT
ON TRACK COOLANT

13



FUEL ADDITIVES

INYETSOL® +



OUTSTANDING PRODUCT



IDEAL PRE-TEST TREATMENT

Suitable for gasoline and diesel engines

500 ml.



1 L.



100 ml.



Injector cleaner • Anti-smoke • Pre-test

New formula. One of the most complete fuel additives on the market, with all the features of 4 products in 1. High-speed cleaner for state-of-the-art injectors that removes all types of dirt or impurities that could hinder good performance in any part of the fuel system. An excellent treatment for fuel and fuel tanks, removes water and condensation.

New 4-in-1 formula

- 1- Injector cleaner
- 2- Anti-smoke
- 3- Pre-test treatment
- 4- Fuel treatment

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0019FAC | 500 ml | 12 |
| CO0019HAC | 1 L | 12 |
| CO0019JAC | 5 L | 4 |
| CO0003YAC | 100 ml | 20 |

STOP SMOKE



100 ml.

200 ml.

IDEAL PRE-TEST TREATMENT

Anti-smoke • Pre-test treatment

Powerful fuel system cleaner that reduces smoke and particle emissions by up to 50%. Ideal for pre-test (technical inspection) treatments. For persistent or very black smoke, we recommend cleaning with Ceroil Inyetsol+ and/or Admission Cleaner.

- Petrol and Diesel.
- Reduces the emission of smoke and polluting gases by up to 50%.
- Reduces unburned hydrocarbon emissions.
- Reduces particle emissions.
- Reduces carbon monoxide (CO) and nitrogen oxide (NOx) emissions.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0042CNA | 100 ml | 20 |
| CO0042FNA | 200 ml | 12 |

CATALYST CLEANER



1 L.

500 ml.

Catalyst cleaner. Diesel and petrol.

Powerful cleaner for catalysts, lambda sensors and other exhaust system components. Ideal for passing emissions tests, as it dissolves accumulated soot and resins.

- Dissolves Diesel fuel and petrol residues in catalysts, lambda sensors, pumps, injectors and exhaust system.
- Reduces maintenance costs.
- Cleans and restores catalyst function.
- Restores proper air/fuel ratio.
- Prolongs catalyst service life.
- Ideal for vehicles used for short journeys.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0052FNA | 500 ml | 12 |
| CO0052HNA | 1 L | 12 |
| CO0052JNA | 5 L | 4 |

DIESEL POWER



1 L.

200 ml.

Diesel enhancer

Increases cetane number (Diesel fuel flammability rating). Improves combustion and reduces particle emissions and opacity in Diesel engines. For all types of Diesel fuel. Avoids having to use the more expensive commercial Diesel fuels produced by oil companies.

- Increases cetane rating and prevents formation of residues due to low-cetane Diesel fuels.
- Improves cold starting and engine power response.
- Stabilizes idle speed and eliminates judder.
- Does not damage catalysts.
- Absorbs water and reduces freezing of Diesel fuel.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0046BNA | 200 ml | 12 |
| CO0046HNA | 1 L | 12 |

DPF CLEANER



1 L.

500 ml.

Cleans the particle filter

High-performance cleaner that regenerates and removes soot from the DPF/FAP quickly and safely, reducing maintenance costs. On short journeys, the DPF/FAP does not reach a high enough temperature to remove the soot, so engines automatically regenerate the DPF by injecting diesel fuel to provoke combustion. This type of driving prevents the process from taking place, leading to the accumulation of soot. This switches on the DPF warning light and reduces engine power, as well as producing excessive fuel consumption and potential faults.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0033FNA | 500 ml | 12 |
| CO0033HNA | 1 L | 12 |
| CO0033JNA | 5 L | 4 |

FUEL ADDITIVES

ACTICIDE® CMG



Anti-bacterial Diesel additive

ACTICIDE® CMG is a solvent-based biocide, a blend of chloromethyl and methylisothiazolinone in glycol, recommended for non-aqueous or low-water-content systems that are susceptible to microbiological contamination. ACTICIDE® CMG has good anticorrosion properties and provides protection against microbiological degradation, as well as preventing residue formation in tanks and refineries, valves, etc.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0056CNA | 100 ml | 20 |
| CO0056FNA | 500 ml | 12 |
| CO0056HNA | 1 L | 12 |
| CO0056JNA | 5 L | 4 |
| CO0056KNA | 25 L | - |


POWER BOOST



Increase gasoline octane and save fuel

Fuel conditioning treatment, which increases the octane number (gasoline flammability index) depending on the concentration applied. The effects of this treatment improve combustion and significantly reduce emissions. It is effective for all types of gasoline. Increases the octane rating of leaded or unleaded gasoline. Contains additives based on metal dissolved in aromatic solvents to facilitate the use of the product and the mixture with fuel.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0057BAC | 200 ml. | 12 |
| CO0057HAC | 1 L | 12 |
| CO0057JAC | 5 L | 4 |
| CO0057KAC | 25 L | - |

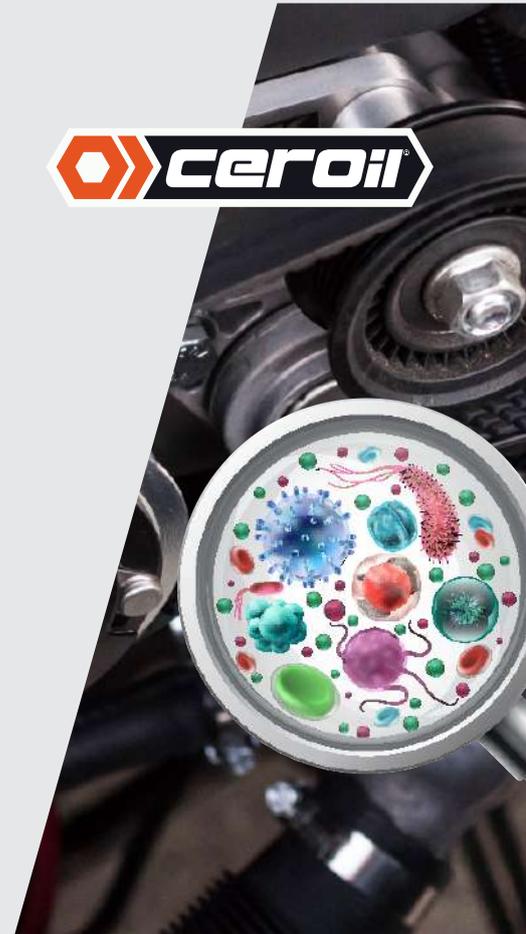

LUBRICANT ADDITIVES

PLATINUM



Ceramic anti-friction treatment

Concentrated ceramic micro-particles which, dispersed in lubricating oil, adhere to metal, forming a thin, diamond-hard protective layer that is very slippery. This produces an anti-friction effect that improves performance, lowers consumption and extends the service life of the engine. Treatment for metal components that does not alter oil properties. For engine and/or gearbox. Appropriate for all types of engine and transmission in passenger, classic, racing, rally, sports and premium cars as well as vans, lorries, cranes, diggers, and nautical and industrial vehicles, etc.

- Reduces fuel consumption by up to 15%.
- Markedly lowers smoke and polluting gas emissions by up to 50%.
- Facilitates cold starting, preventing wear at this critical time.
- Markedly improves performance at low speeds.
- Reduction in energy loss due to friction.
- Lowers engine, gearbox and transmission operating temperature.
- Improves engine compression and extends the service life of the engine.
- Minimizes wear caused by mineral oil EP additives.
- Reduces oil consumption, since it covers its tolerances.
- Does not alter oil properties.
- Product is totally harmless to the engine.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0014DTA | 100 ml | 20 |
| CO0014BTA | 200 ml | 12 |
| CO0014HTA | 1 L | 12 |



Drastically reduces friction

Concentrated ceramic micro-particles which, dispersed in lubricating oil, adhere to metal, forming a thin, diamond-hard protective layer that is extremely slippery. This produces an anti-friction effect that improves performance, lowers consumption and extends the service life of the engine. Treatment for metal components that does not alter oil properties. Suitable for both 2-stroke and 4-stroke engines. Treatment for engine and/or gearbox.

- Reduces fuel consumption by up to 15%.
- Markedly lowers smoke and polluting gas emissions by up to 50%.
- Facilitates cold starting, preventing wear at this critical moment.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0014CTA | 100 ml | 20 |

LUBRICANT ADDITIVES

HYDRAULIC TAPPETS

390 ml.



Reduces hydraulic system noise

Detergent additive for cleaning oil ducts and hydraulic tappets. In addition, its anti-friction effect reduces tappet and valve noise.

- Reduces tappet noise.
- Eliminates lubricant residues.
- Improves hydraulic pushrod operation.
- Improves engine performance.
- Suitable for both Diesel and petrol engines.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0058FNA | 390 ml | 6 |

VISCOSITY +

400 ml.



Increases oil viscosity index

Product formulated from a mixture of synthetic-based products that act as friction modifiers, markedly improving the viscosity index and thus increasing compression.

- Increases engine compression.
- Improves engine power.
- Reduces internal engine component wear and friction.
- Reduces engine noise.
- Restores cylinder compression.
- Reduces oil consumption and exhaust smoke.
- Marked increase in viscosity index.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0059FNA | 400 ml | 6 |
| CO0059BNA | 200 ml | 12 |



KITS

KIT ECONOMIZER



Comprehensive engine treatment: injector cleaner + ceramic anti-friction treatment

CEROIL PLATINUM: Concentrated ceramic micro-particles that disperse in lubricating oil and adhere to metal, creating a thin, diamond-hard layer that is extremely slippery. This produces an anti-friction effect which improves performance, lowers consumption and extends the service life of the engine.

INYETSOL+: The most complete fuel additive. All the features of 4 products in 1. High-speed cleaner using state-of-the-art technology. Remove any dirt that is obstructing fuel ducts and preventing proper injector operation.

- Suitable for petrol and Diesel.
- Reduces fuel consumption by up to 15%.
- Reduces smoke and polluting gas emissions by up to 44%.
- Facilitates cold starting.
- Removes residues and carbon from the combustion chamber.
- Does not alter fuel octane rating.



| REF | CAPACITY | U/BOX |
|-----------|-----------------|-------|
| CO0032FNA | 500 ml + 200 ml | 12 |
| CO0035FNA | 100 ml + 200 ml | 12 |

| REF | CAPACITY | U/BOX |
|-----------|-----------------|-------|
| CO0031FNA | 100 ml + 100 ml | 12 |

| REF | CAPACITY | U/BOX |
|-----------|-----------|-------|
| CO0034FNA | 1 L + 1 L | 6 |

2-PHASE DPF CLEANER KIT



Cleans and regenerates the particle filter

High-performance cleaner that regenerates and removes soot from the DPF/FAP quickly and safely, reducing maintenance costs. On short journeys, the DPF/FAP does not reach a high enough temperature to remove the soot. Engines automatically regenerate the DPF by injecting diesel fuel to cause combustion, but this type of driving prevents the process from taking place, leading to an excessive accumulation of soot. This switches on the DPF warning light and reduces engine power, as well as producing excessive fuel consumption and potential faults.

- PHASE 1 - DECARBONIZER
- PHASE 2 - NEUTRALIZER

ACCESSORY: Flush gun for product application and efficient cleaning of the DPF.

| REF | CAPACITY | U/BOX |
|-----------|-----------|-------|
| CO0050HNA | 1 L + 1 L | 6 |
| CO0050JNA | 5 L + 5 L | 4 |
| PIDPF | 750 ml | GUN |

STOP LEAK

EXPRESS RADIATOR STOP LEAK



Repairs and prevents minor leaks

Green additive for rendering visible the location of the leak. For coolant that repairs minor leaks in the cooling circuit and protects against oxidation and corrosion. For all types of radiators and heating systems.

- Cleans the radiator system by removing limescale, oxides and debris.
- Seals minor cooling system leaks.
- Harmless to rubber and gaskets.
- Low pour point. Excellent heat transfer.
- Excellent anti-corrosion protection.
- Reduces maintenance costs.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0021BIS | 200 ml | 12 |
| CO0021FIS | 500 ml | 12 |
| CO0021HIS | 1 L | 12 |
| CO0021JIS | 5 L | 4 |

COPPER RADIATOR STOP LEAK



Permanent seal treatment

Permanent sealing treatment for cooling circuits, consisting of a blend of ceramic and copper particles that are activated by heating to permanently seal the leak. For all types of aluminium, iron, copper or brass radiators and heating systems, including radiators with a plastic tank.

- No clogging or obstruction. Life-long radiator sealing.
- Harmless to gaskets and rubber. Does not seal on hoses.
- Compatible with all antifreeze.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0036BNA | 200 ml | 12 |
| CO0036FNA | 500 ml | 12 |
| CO0036HNA | 1 L | 12 |
| CO0036JNA | 5 L | 4 |

ENGINE STOP LEAK



Regenerates gaskets and prevents leaks

Oil-soluble additive that regenerates hardened gaskets, seals small cracks, and stops and prevents minor oil leaks. For all types of Diesel and petrol engines that leak oil.

- Restores the elasticity of sealing rings and crankshaft, camshaft and valve guide oil seals made of rubber or neoprene.
- Does not alter oil quality or viscosity.
- Reduces engine oil consumption.
- Eliminates oil leaks.
- Restores the elasticity of engine gaskets and oil seals.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0030FNA | 500 ml | 12 |
| CO0030HNA | 1 L | 12 |
| CO0030JNA | 5 L | 4 |

STOP LEAK

POWER STEERING STOP LEAK

100 ml.



Regenerates gaskets and stops leaks

Oil-soluble additive that regenerates hardened gaskets, seals small cracks, and stops and prevents minor oil leaks in the power steering system. Compatible with all oils used in power steering systems or automatic transmissions that meet DEXRON or equivalent and LHM specifications.

- Restores elasticity of rubber or neoprene gaskets.
- Prevents and seals leaks with no disassembly.
- Does not alter oil quality or viscosity.
- Ensures optimal performance and reduces power steering noises.
- Prevents ageing and oxidation of power steering fluid.

MT STOP LEAK

200 ml.



Regenerates gaskets and stops leaks

Oil-soluble additive for regenerating gearbox gaskets and oil seals, restoring leak tightness. Prevents oil particles from entering dry clutches and insufficient transmission lubrication, as well as potential gearbox damage due to low oil levels.

Suitable for all types of mechanical gearboxes, differential gears and output gears. Do not use in automatic transmissions or wet clutches.

- Stops oil dripping from gearboxes and transmissions.
- Regenerates and softens hardened gaskets.
- Protects clutches from oil leaks, prevents insufficient lubrication and transmission damage.



| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0087CNA | 100 ml | 8 |

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0088BNA | 200 ml | 12 |

REF. CO0037PU
CARDBOARD CEROIL DISPLAY 4B



REF. CO0035PU
TABLETOP CEROIL DISPLAY



SPRAYS

ADMISSION CLEANER



400 ml.



Admission system cleaner

Powerful organic cleaner that removes residues and sediments from the admission system, turbos, EGR valves, etc. Ideal pre-test treatment.

For admission systems of all Diesel, petrol, turbo and carburettor engines. Excellent foam filter cleaner.

- Protects and cleans oxygen sensors and catalyst.
- Cleans by wear and/or wiping, eliminating the risk of hard core shell particles entering the combustion chambers.
- Restores idle speed.

| REF | CAPACITY | U/BOX |
|-----------|--------------|-------|
| CO0041EIS | 400 ml spray | 12 |

PENETRATING FLUID



400 ml.



Ceramic penetrating oil

Multipurpose concentrated ceramic penetrating oil. Descals, loosens and lubricates all oxidized and/or seized parts.

- Fast, long-lasting lubrication of descaled parts.
- Oxidation and corrosion protection.
- Excellent penetration thanks to micronization of ceramic particles.
- Removes tar residues, rust and corrosive particles.
- Reduces noises (metal on metal) and metallic seizing due to temperature, humidity or oxidation.
- Harmless to rubber and plastics.
- Prevents adherence of salts, inks, dust, etc.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0016EIS | 400 ml | 12 |
| CO0016KIS | 25 L | - |

BRAKE CLEANER



400 ml.



Brake and clutch cleaner

Powerful ultra-fast-drying cleaner for brakes, clutches and other mechanical parts.

- Quickly applied highly volatile product.
- Removes oil, grease, brake fluid, dust and friction debris.
- Eliminates clutch seizure caused by oxidation of metallic parts.
- Eliminates brake pad squeal.
- Harmless to rubber and plastics.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0022EIS | 400 ml | 12 |
| CO0022JIS | 5 L | 4 |
| CO0022KIS | 25 L | - |

QUICK START



200 ml.



Facilitates engine starting.

Solvent- and oil-based quick-start spray with flammable propellant. Suitable for all types of Diesel or petrol engines.

- Fast and safe for starting problems, particularly in cold, damp climates.
- Suitable for engines with compression problems.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0047BIS | 200 ml | 12 |

CARBON CLEANER



400 ml.



Decarbonizer

Powerful decarbonizer, removes debris stuck to injectors, turbos, EGR valves, etc. Ideal pre-test treatment.

For admission systems of all Diesel, petrol, turbo and carburettor engines. Excellent foam filter cleaner.

- Reduces fuel consumption and emissions.
- Removes debris and sediments from the admission system.
- Protects and cleans oxygen sensors and catalyst.
- Cleans by wear and/or wiping, eliminates the risk of hard core shell particles entering the combustion chambers.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0053EIS | 400 ml | 12 |
| CO0053JIS | 5 L | 4 |
| CO0053KIS | 25 L | - |

INJECTOR UNBLOCKER



400 ml.



Unblocks injectors and spark plugs

Penetrating spray with boron nitride ceramics and lubricant that helps release seized injectors and spark plugs, freeing them to allow their removal.

- Facilitates fast extraction of seized injectors and spark plugs.
- Contains ceramic and other composite microparticles that penetrate and facilitate extraction.
- Does not contain products that harm the engine.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0077FIS | 400 ml | 12 |

SPRAYS

DRY LUBE



400 ml.



Dry ceramic lubrication

High concentration ceramic lubricant for dry lubrication of metals and plastics. For all types of use such as lubrication of guides and slide rails, ejectors and slides in injection moulds, firearms. Excellent mould release and anti-stick agent for high temperatures. Eliminates weld splatter. Dry lubrication for all sectors of industry.

- Reduces friction, prevents wear and protects against corrosion.
- Dry-lubricates continuously at up to 950 °C.
- Reduces noise (metal on metal).

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0009EIS | 400 ml | 12 |

CONTACT CLEANER



200 ml.



Oxide remover

Product for removing dirt from electrical systems. Dissolves and eliminates oxides and sulphurs produced by the effects of flooding and damp on electrical circuits and systems.

Can also be used for removing oils and resins. Non-aggressive product. Harmless to the most common materials in electrical systems.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0076BLI | 200 ml | 12 |

ALCOHOL SPRAY



400 ml.



Isopropyl alcohol - Spray cleaner


Highly efficient spray cleaner for all types of surface. 100% isopropyl alcohol for cleaning various treated surfaces

- Fast cleaning.
- Eliminates any dirt or POLLUTANT
- EVAPORATES COMPLETELY.
- Leaves no residue.
- Does not deteriorate rubber protectors.
- Very easy to use.
- Highly effective.
- Perfume-free



| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0075ELI | 400 ml | 12 |

MULTI LUBE



400 ml.



Multipurpose ceramic lubricant

Concentrated multipurpose lubricant with ceramics and teflon. Descals, loosens and lubricates oxidized and/or seized parts.

- Excellent lubricating, EP and anti-wear properties.
- High stability to oxidation and ageing.
- Lubricates at high temperatures.
- Protects against internal and external corrosion.
- Excellent penetration thanks to low micronization of ceramic particles.
- Reduces noises (metal on metal) and metallic seizing due to temperature, humidity or oxidation.
- Harmless to rubber and plastics.

* MULTI-LUBE PLUS with high ceramic content.

| REF | CAPACITY | U/BOX |
|-------------|----------|-------|
| CO0007EIS | 400 ml | 12 |
| * CO0010EIS | 400 ml | 12 |

MP 2.5 GREASE



400 ml.



White lithium grease

Multifunctional lithium grease with very high thermal stability for multiple applications. For all types of uses such as bearings, rollers, guides, open gears, racks, valve wrenches, shafts and mechanical closures on water pumps, injection moulds, etc.

- Reduces friction and prevents wear.
- Reduces thermal degradation.
- From -30 °C to +160 °C
- Reduces noises (metal on metal) and metallic seizing due to temperature, humidity or oxidation.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0008EIS | 400 ml | 12 |
| CO0004HIG | 1 kg | 6 |
| CO0004JIG | 5 kg | 4 |



CLEANER +



5 L.



Universal degreasing cleaner

Universal degreasing cleaner for removal of grease and all types of persistent residue.

Effortlessly removes residue, grease and oil from all types of metal and plastic components without using caustic or aggressive products.

- Excellent exterior degreasing cleaner. Removes grease and residues from metal.
- Removes tar residues, rust and corrosive particles.
- Quickly applied highly volatile product.
- Harmless to rubber and plastics.
- Low-toxicity product. Biodegradable.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0020JIS | 5 L | 4 |
| CO0020KIS | 25 L | - |

ULTRA CLEANER



5 L.



Biodegradable degreaser

Multifunction industrial degreaser for cleaning components and for ultrasound machines.

Active degreaser based on polyalcohol solvents and corrosion inhibitors. Specially formulated for removing grease and all types of persistent dirt. Does not contain NaOH (caustic soda)

Thanks to its high cleaning power, it removes grease and more ingrained dirt with no need to use mechanical effort or aggressive products.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0049JNA | 5 L | 4 |
| CO0049KNA | 25 L | - |

BRAKE CLEANER



5 L.



Brake and clutch cleaner

Powerful ultra-fast-drying cleaner for brakes, clutches and other mechanical parts.

- Quickly applied highly volatile product.
- Removes oil, grease, brake fluid, dust and friction debris.
- Eliminates clutch seizure caused by oxidation of metallic parts.
- Eliminates brake pad squeal.
- Harmless to rubber and plastics.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0022EIS | 400 ml | 12 |
| CO0022JIS | 5 L | 4 |
| CO0022KIS | 25 L | - |

UREA



10 L.



Reduction of exhaust gas NOx

Urea solution at approximately 32.5% dissolved in demineralized water, that must be used in both heavy and light Diesel vehicles with SCR (selective catalytic reduction) technology to meet Euro 4, Euro 5 and Euro 6 emissions standards.

- Additive that enables the reduction of polluting gases which contribute to the greenhouse effect by converting nitrogen oxides into natural atmospheric components (nitrogen and water vapour).

| REF | CAPACITY | U/BOX |
|-----------|-------------|-------|
| CO0090GNA | 10 L | - |
| CO0090RNA | BIDÓN 200 L | - |
| CO0090ZNA | IBC 1000 L | - |

SCR CLEANER



100 ml.



Urea injector cleaner - SCR

Active substance to solve clogging problems due to crystallization in AdBlue injectors. The specially developed formula cleans dirty urea injectors and SCR catalysts. This can prevent from loss of performance to engine failure. Its shelf life is at least 18 months in sealed containers, and stored at a room temperature that does not exceed 25°C and never below -11°C.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0091CLI | 100 ml | 20 |
| CO0091FLI | 500 ml | 12 |
| CO0091HLI | 1 L | 12 |
| CO0091JLI | 5 L | 4 |



CLEANING & MAINTENANCE

GASKET SILICONE



Non-acetic gasket-forming silicone

For mechanical joints. Used for crankshafts, crankcases, gearboxes, thermostats, oil ducts, sealing junction boxes, water pumps, waterproof seals in electrical equipment, etc.

- Resistant to oils, antifreeze, hydrocarbons and damp.
- Resistant to the combustion cycle, vibration and impacts, producing an efficient joint.
- High mechanical stability to vibrations.
- High adhesion capacity and flexibility.
- Can fill in large cavities.
- Harmless to gaskets, rubber and metals such as aluminium and steel.
- High thermal resistance from -60 °C to 260 °C

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0038CNA | 200 ml | 12 |

RADIATOR CLEANER - ACIDIC



Removes rust from the cooling system

It is an additive that cleans and removes oxides, limescale and grease from cooling systems. For all cooling circuits and radiators in all passenger cars, buses, trucks, nautical equipment and machinery.

- Cleans the radiator system by removing oxides and debris.
- Harmless to rubber, gaskets and metals.
- Excellent anti-corrosion protection.
- Reduces maintenance costs.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0028FNA | 500 ml | 9 |
| CO0028HNA | 1 L | 6 |
| CO0028JNA | 5 L | 4 |
| CO0028KNA | 25 L | - |

RADIATOR CLEANER - ALKALINE



Eliminates oil from cylinder head failure

This is a coolant additive that removes oil originating from a cylinder head gasket failure and also cleans and removes oxides, limescale and grease from the cooling system. For all cooling circuits and radiators in all passenger cars, buses, trucks, nautical equipment and machinery.

- Cleans the radiator system by removing oxides and debris.
- Harmless to rubber, gaskets and metals.
- Excellent anti-corrosion protection.
- Reduces maintenance costs.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0047FNA | 500 ml | 9 |
| CO0047HNA | 1 L | 6 |
| CO0047JNA | 5 L | 4 |
| CO0047KNA | 25 L | - |

ENGINE CLEANER



Cleaner additive for oil

Eliminates all kinds of debris, sediments and scale from the crankcase interior. For petrol and Diesel engines. Can be applied to all internal engine parts: crankcase, connecting rods, crankshaft, camshafts, valves, piston rings, oil pump, housings, hydraulic systems, gearboxes, pins, etc.

- Extends service life and improves the circulation of new oil.
- Non corrosive. Harmless to rubber, plastics and metals.
- Miscible with all mineral and synthetic oils.

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0029FNA | 500 ml | 12 |
| CO0029HNA | 1 L | 12 |
| CO0029JNA | 5 L | 4 |
| CO0029KNA | 25 L | - |

BODYWORK SHAMPOO




Foam for pressure-washing vehicles

Concentrated product for manual or car wash use in washing bodywork (cars, trucks, etc.). Suitable for cleaning and protecting the vehicle exterior from all weather conditions such as sun, dust and rain.

Professional cleaning products for cars or trucks have been thoroughly tested to achieve optimum cleanliness of your car or trucks bodywork. They also act on the most fraught areas of the vehicle, avoiding obstruction and wear of nozzles, tubes and pumps.

| REF | CAPACITY | U/BOX |
|----------|----------|-------|
| CO090HLI | 1 L | 12 |
| CO090JLI | 5 L | 40 |
| CO090KLI | 25 L | - |

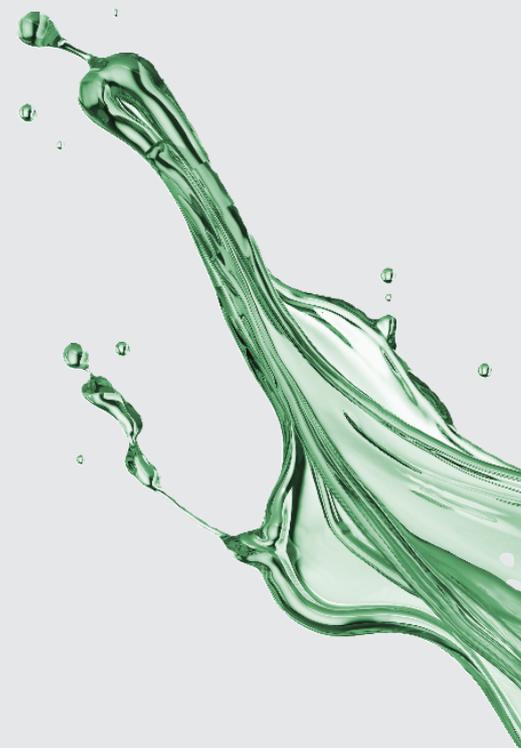

CLEANING & MAINTENANCE



WINDSHIELD WIPERS



5 L.

Windshield wipers -10°C with rain repellent

Producto especialmente preparado para su uso directo en los depósitos de los vehículos, que sirve para repeler el agua de la lluvia, eliminar y limpiar el parabrisas del vehículo toda clase de suciedad, barro, mosquitos, etc. Disponemos de dos formatos especiales de limpiaparabrisas: (CO0045JNARP) Repelente de lluvia y (CO0045JNAR) Repelente de lluvia y anticongelante hasta -100C

| REF | CAPACITY | U/BOX |
|-------------|----------|-------|
| CO0045JNA | 5 L. | 4 |
| CO0045JNARP | 5 L | 4 |
| CO0045JNAR | 5 L | 4 |

HAND WASH PASTE



5 L.

Lemon-scented handwash paste

Handwashing paste with microparticles of natural origin, ideal for removing traces of grease, oil, lubricants, hydrocarbons, bitumen, carbon black, rust, graphite, etc.

- Free of solvents and silicone
- Microparticles of natural origin (plastic-free)
- Lemon scent
- Enriched with softening agents
- Dermatologically tested

| REF | CAPACITY | U/BOX |
|-----------|----------|-------|
| CO0092JLI | 5 L | - |

ANTIFREEZE & COOLANTS

WINTER DIESEL



1 L.

5 L.

DIESEL FUEL

Antifreeze for Diesel fuel

Diesel fuel cold fluidity improver additive Widens range of use of Diesel fuel by reducing its freezing point. Delays the appearance of crystals in the Diesel fuel that obstruct the filter and prevent the engine from starting. Special additive for reducing Diesel fuel freezing point.

For all types of automotive vehicles with a Diesel engine. Also for buses, trucks, agricultural and public works machinery, etc.

| REF | CAPACIDAD | U/CAJA |
|-----------|-----------|--------|
| CO0042HNA | 1 L | 12 |
| CO0042JNA | 5 L | 4 |

RACING COOLANT



1 L.

5 L.

COMPETITION

Formula without water -55 °C to 185 °C

Concentrated colourless waterless coolant/antifreeze. Its boiling point above 185 °C prevents cooling system overheating, cavitation and boiling. Protection from -55 °C to 185 °C.

For racing cars and motorcycles if race regulations allow it. Recommended for cooling systems that are incompatible with water.

- Prevents overheating.
- Reduces cooling system pressure.
- Prevents water-induced corrosion.

| REF | CAPACIDAD | U/CAJA |
|-----------|-----------|--------|
| CO0048HNA | 1 L | 12 |
| CO0048JNA | 5 L | 4 |
| CO0048KNA | 25 L | - |

ON TRACK COOLANT



1 L.

5 L.

COMPETITION

Coolant for circuit track racing

Colourless fluid, coolant, formulated without glycol and with demineralized H₂O-based anticorrosion additives. Developed for use in car and motorcycle circuit track racing when regulations allow it.

- Formulated without glycol.
- Does not slip when in contact with the asphalt.
- High heat transmission qualities.
- Reduces engine operating temperature.
- Highly anti-corrosive.
- Prevents crystallization of scale.

| REF | CAPACIDAD | U/CAJA |
|-----------|-----------|--------|
| CO0055HNA | 1 L | 12 |
| CO0055JNA | 5 L | 4 |
| CO0055KNA | 25 L | - |

ANTIFREEZE & COOLANTS

ORGANIC



5 L.

Organic antifreeze 3%

New generation antifreeze-coolant for closed circuits, manufactured with long-lasting organic technology corrosion inhibitors "Long Life", composed of 3% Glycols and distilled-demineralized water.

Available in yellow.

| REF | CAPACITY | U/BOX |
|-------------|----------|-------|
| CO0039HNAAM | 1 L | 15 |
| CO0039JNAAM | 5 L | 4 |



5 L.

Organic antifreeze 10%

New generation antifreeze-coolant for closed circuits, manufactured with long-lasting organic technology corrosion inhibitors "Long Life", composed of 10% Glycols and distilled-demineralized water.

Protection: -5°C Boiling point: 115°C

Available in yellow.

Technical specifications:

UNE 26.361.88

| REF | CAPACITY | U/BOX |
|-------------|----------|-------|
| CO0025HNAAM | 1 L | 15 |
| CO0025JNAAM | 5 L | 4 |



5 L.

Organic antifreeze 30%

New generation antifreeze-coolant for closed circuits, manufactured with long-lasting organic technology corrosion inhibitors "Long Life", composed of 30% Glycols and distilled-demineralized water.

Protection: -18°C Boiling point: 125°C.

Available in green and pink.

Technical specifications:

UNE 26.361.88 / ASTM D3306 / SAE J-1034

| REF | CAPACITY | U/BOX |
|------------|----------|-------|
| CO0023HNA | 1 L | 15 |
| CO0023JNA | 5 L | 4 |
| CO0023HNAR | 1 L | 15 |
| CO0023JNAR | 5 L | 4 |

ORGANIC



5 L.

Organic antifreeze 50%

New generation antifreeze-coolant for closed circuits, manufactured with long-lasting organic technology corrosion inhibitors "Long Life", composed of 50% Glycols and distilled-demineralized water.

Protection: -35°C Boiling point: 145°C

Available in green and pink.

Technical specifications:

UNE 26.361.88 / ASTM D3306 / SAE J-1034

| REF | CAPACITY | U/BOX |
|------------|----------|-------|
| CO0024HNA | 1 L | 15 |
| CO0024JNA | 5 L | 4 |
| CO0024HNAR | 1 L | 15 |
| CO0024JNAR | 5 L | 4 |

SPECIALLY FOR LOW TEMPERATURES



5 L.

G12 50%

New generation antifreeze-coolant for closed circuits. Made with organic technology corrosion inhibitors, composed of 50% glycols and distilled-demineralized water. Protects the radiator, water pump and the entire cooling circuit from corrosion, especially those containing aluminum and alloy elements.

Protection: -35°C Boiling point: 150°C

Available in blue.

Technical specifications:

VWTL 774 D G-12 - VWTL 774 F G-12 PLUS - UNE 26.361.88 - SAE J1034

ASTM D3306 - ASTM D4656 - ASTM D5345 - ASTM D4985 - BRITISH STANDARD 6580 - FEDERAL STANDARD 0-A 548 D - NATO S759 - SKODA

SEAT - PORSCHE - MAN 324 - Type SNF RENAULT - PEUGEOT - CITROËN

| REF | CAPACITY | U/BOX |
|------------|----------|-------|
| CO0043HNAA | 1 L | 15 |
| CO0043JNAA | 5 L | 4 |



CEROIL Product is a family firm that manufactures and distributes maintenance products for automotive, nautical and industrial use, specializing in additives. These products prevent faults from occurring or solve them without needing to remove or disassemble components.

Products of this type use what is known as chemical mechanics, truly effective if used regularly and above all preventively. They are alternative solutions to costly repairs:

The best solution is prevention.

With a firm commitment to caring for the environment, in addition to the above-mentioned additives CEROIL's broad offering includes certified **ecological and biodegradable products** for dry cleaning vehicles, as well as a few disinfectants.

- **Cris Cano - Brand Manager:** *"Our main objective is to offer our customers the best possible solution with a top-quality product and value for money, paying special attention to being environmentally friendly by using the most suitable components."*
- **Juan Cano - CEO & Founder:** *"We have been in this market for more than 20 years, building on the quality of our range of products and improving our offering day by day according to market needs."*



Insemac

CEROIL PRODUCT, S.L.

C/ Mestral s/n - P.I. Can Volart

08150 Parets del Vallés

Barcelona - Spain

T. +34 93 160 05 30 E. info@ceroil.com

 ceroil.com



PDF

Download or visit our catalogue in PDF